


ne IBRADRIVE

GRID SPECIFICATIONS

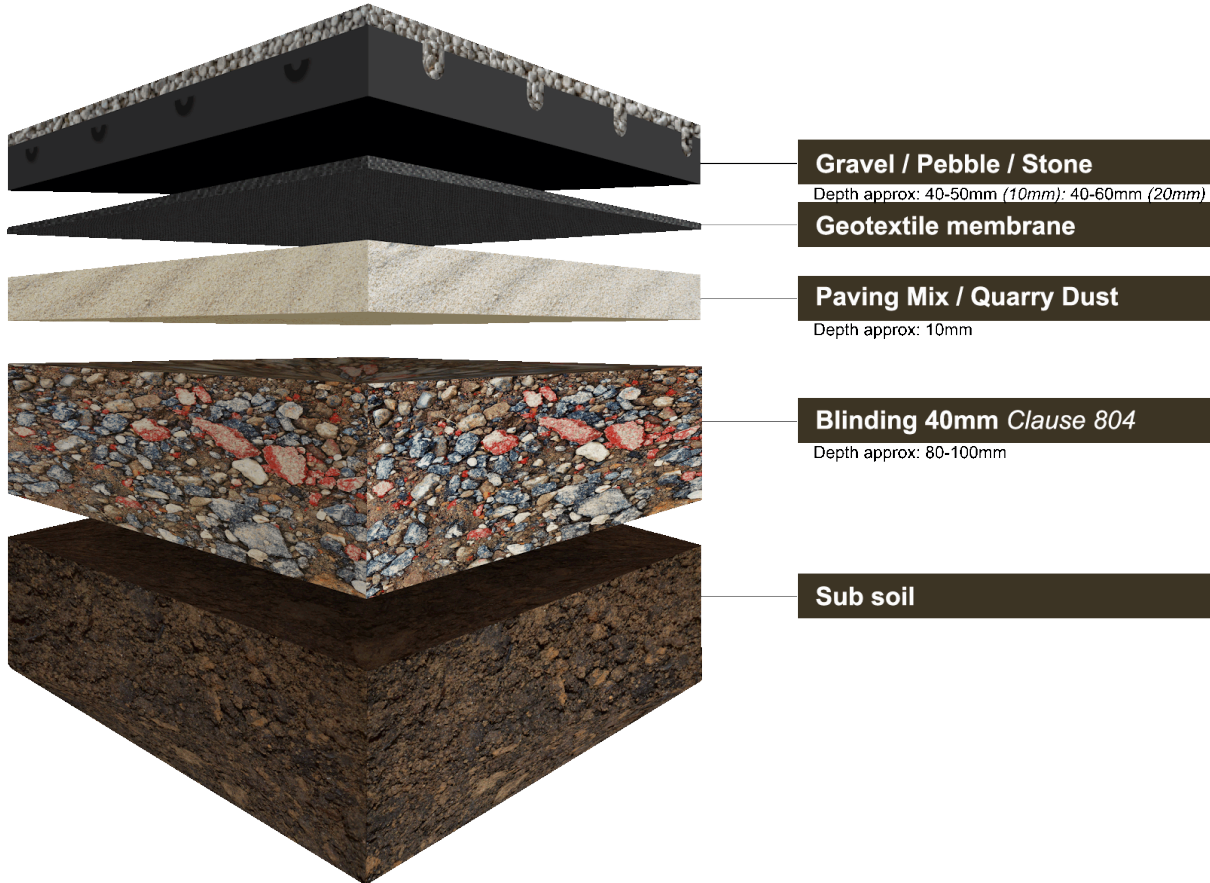

- ▲ Non-Toxic, chemically stable & plant and tree safe.
- ▲ 95% permeable & complies with SUDs and part m building regulations
- ▲ Complies with flood and water management act 2010
- ▲ Temperature stable between -50 and 90°C
- ▲ UV stable, injection moulded, PP/PE blend
- ▲ Suitable for domestic and industrial use
- ▲ Built in anti-migration & reinforcement cell bottom lattice
- ▲ Load bearing: up to 150t/m² (empty)
- ▲ Grid size: 500mm (l) x 500mm (w) x 40mm (d)
- ▲ RIB wall thickness: 3.5mm
- ▲ 4 grids per square metre
- ▲ Axle weight: 25t
- ▲ Tested slope tolerance: 1 in 4 (25% or 15°)
- ▲ Colour: Black

Norman Emerson Group Ltd 1 Annaloiste Road, Lurgan, Craigavon BT66 6NH